
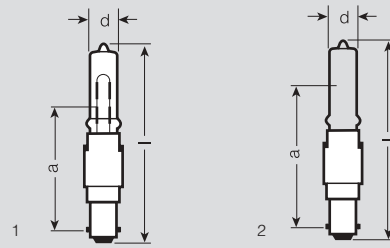


HALOLUX CERAM® with B15d base for mains voltage



OSRAM HALOLUX CERAM® permits unshielded operation with no need for a protective cover glass to IEC 60598-1 on the luminaire, thanks to an integral safety fuse and UV FILTER quartz (to IEC 60432-2).

Product reference

Product number



HALOLUX CERAM® with B15d base

clear

64466	4050300500928	25	260	1500	B15d	18	67	39	1	10
64467	4050300467306	40	490	1500	B15d	18	67	39	1	10
64481	4050300468839	60	820	2000	B15d	18	67	39	1	10
64469	4050300314969	60	820	2000	B15d	18	86	55	1	10
64473	4050300011851	75	1100	2000	B15d	18	86	55	1	10
64475	4050300011899	100	1500	2000	B15d	18	86	55	1	10
64471	4050300019505	150	2500	2000	B15d	18	86	55	1	10
64477	4050300040999	150	2500	2000	B15d	18	98	67	1	10
64479	405030004112	250	4350	2000	B15d	18	98	67	1	10

frosted, outside

64466AM	4050300582344	25	230	1500	B15d	18	67	39	2	10
64467AM	4050300467320	40	460	1500	B15d	18	67	39	2	10
64481AM	4050300468853	60	790	2000	B15d	18	67	39	2	10
64469AM	4050300314983	60	790	2000	B15d	18	86	55	2	10
64473AM	4050300011868	75	1050	2000	B15d	18	86	55	2	10
64475AM	4050300011905	100	1470	2000	B15d	18	86	55	2	10
64471AM	4050300019512	150	2400	2000	B15d	18	86	55	2	10
64477AM	405030004105	150	2400	2000	B15d	18	98	67	2	10
64479AM	405030004129	250	4210	2000	B15d	18	98	67	2	10



For small narrow luminaires there are clear and frosted HALOLUX CERAM® lamps with B15d base.

* To ensure that your order reaches you quickly, please order standard pack quantities